

# M1-M2 Paper ream wrappers

## FOIL REAM WRAPPING SOLUTION FOR ANY PRODUCTION DEMAND

Allows automated change of format, instantaneous hot-melt gluing and automated palletizing and depalletizing of stacks and empty pallets.

Single outlet (M1) and double outlet (M2) options.

Allows reducing staff numbers and guarantees outstanding quality and production.

Can incorporate auxiliary peripherals.



### ADVANTAGES

The double outlet configuration for this type of unit provides non-stop finished product download operation.

The advanced design and simplification of mechanical elements allows reducing maintenance costs and minimizes the risk of malfunction.


### AVAILABLE OPTIONS

- › These units can integrate auxiliary peripherals such as barcode label printers.
- › Other available options are the empty pallet recirculation system, quick feed system for reams and revolver type unwind stands.



## CHARACTERISTICS

Ream max. width	1400 mm
Ream min. width	530 mm
Ream max. length	1100 mm
Ream min. length	420 mm
Ream max. height	80 mm
Ream min. height	15 mm
Max. speed	15 reams/min.
Ream max. weight	50 Kg.
Max. stack height and inlet and outlet	1800 mm
Max. stack weight	2000 Kg.

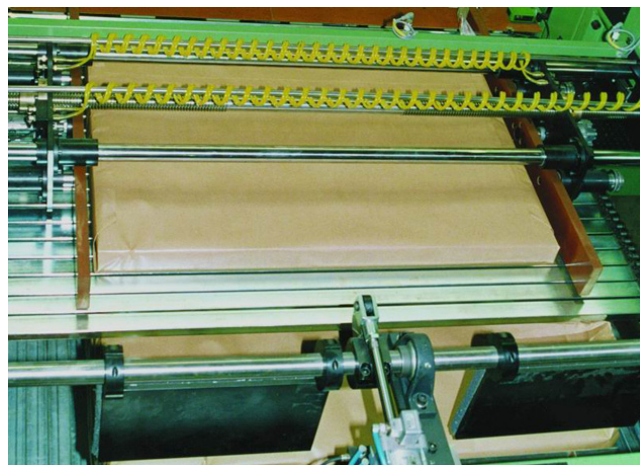

More information (videos, photos): <http://www.pasaban.com/UK-en/file/31/M1-M2>



PASABAN S.A. Auzo-txikia, 17 20400 Tolosa-España.  
T.: +34 943 65 16 32 Email: info@pasaban.com

**Pasaban**